



GENTLE GROUND

Grounded Suede / Grounded Contours

FlexForm™ LVT

Milliken®

GENTLE GROUND

Gentle Ground is a collection that blurs the boundary between what is felt and what is seen — where hard surfaces carry the visual and emotional warmth of textile and nature. This collection was designed to soften interior spaces through subtle tactility and refined surface movement.

Each pattern explores the concept of comfort underfoot, not through plushness, but through nuanced visual texture and natural calm. Whether it's the pebble-like softness of Grounded Suede or the sweeping, architectural rhythm of Grounded Contours, the collection transforms LVT into a canvas of gentle expression.


MILLIKEN
FlexForm™
Luxury Vinyl Flooring

(left) Gentle Touch Collection, Flowing Contours in Whispering Sand,
(middle) Grounded Contours in Creamy Sand, (right) Grounded Suede in Dewy Stone and Dandelion Dust.

Inspired By Softness,
Grounded In Strength.



FLEXFORM™ LVT CONSTRUCTION

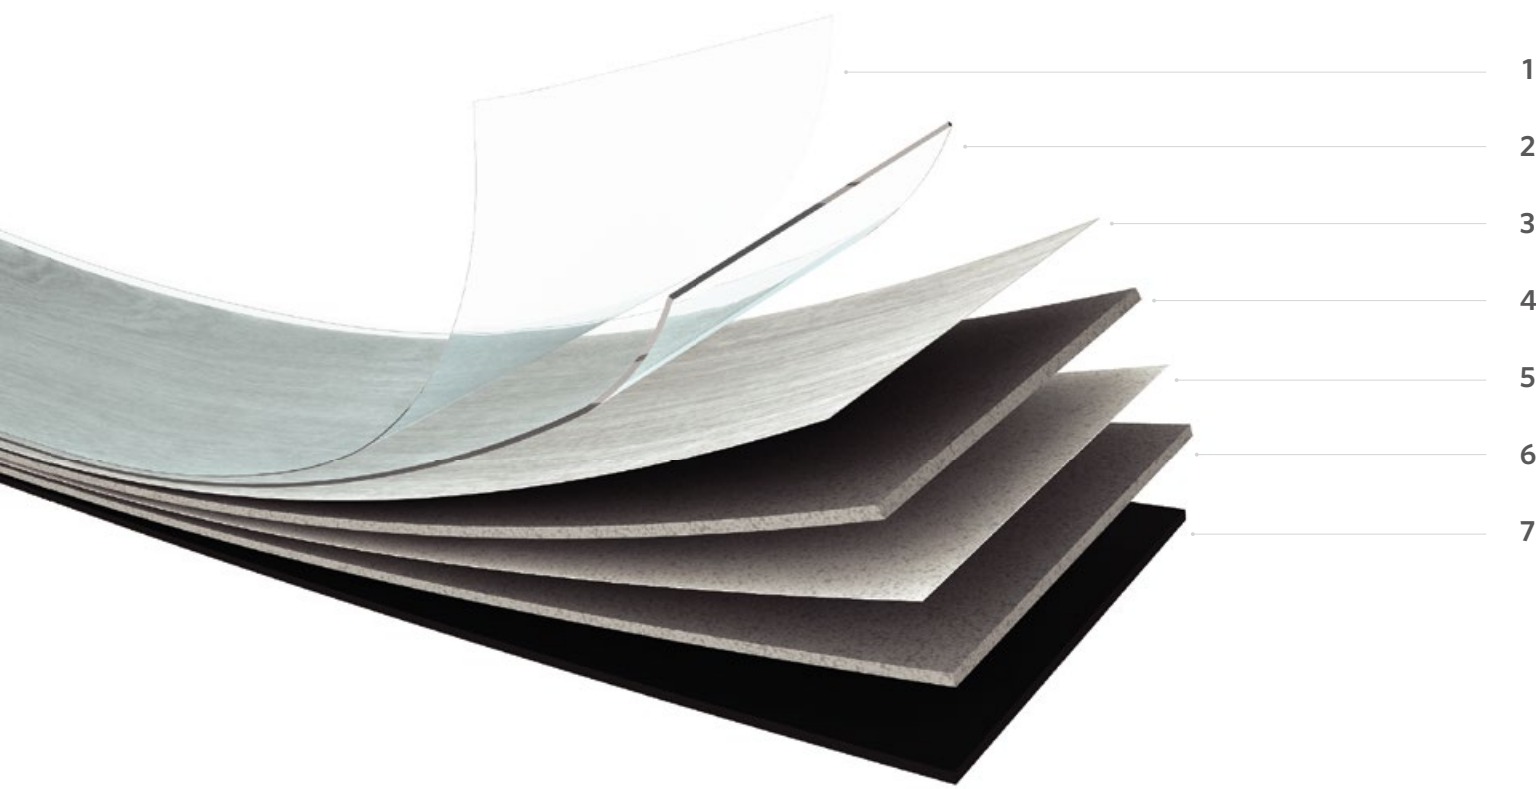

OVERALL
THICKNESS
5mm

WEAR LAYER
THICKNESS
0.55 mm

- 1. **PROGUARD™ REINFORCED POLYURETHANE COATING**
Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.
- 2. **0.55MM TRANSPARENT WEAR LAYER**
Heavy commercial grade 0.55mm transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.
- 3. **DESIGN PHOTOGRAPHIC FILM**
State of the art printing technology providing authentic visuals and designs.
- 4. **HIGH DENSITY CORE**
Ensures excellent durability, stability and long term performance.
- 5. **GLASS FIBER LAYER**
Supports dimensional stability.
- 6. **HIGH DENSITY CORE**
Ensures excellent durability, stability and long term performance.
- 7. **VINYL BACKING LAYER**
Engineered balance layer provides stability and durability of the product.

FLEXFORM™ LVT that works
Easier *and* Smarter



SUSTAINABILITY

In keeping with Milliken’s long-standing culture of sustainability, our Luxury Vinyl Tile products are 100% Ortho-Phthalate free. They do not contain problematic post-consumer recycled material. Further, Milliken’s Luxury Vinyl Tiles are certified to the most stringent global environmental standards.
For further information, visit:
millikenfloors.com/sustainability



WARRANTY

Milliken Luxury Vinyl Tile products are backed by a 15 year Heavy Commercial warranty, ensuring quality and giving peace of mind.




ENHANCED INVENTORY PROGRAM

With an enhanced inventory level for large installations containing select patterns and colors, Milliken’s Asia based inventory system makes it easy to respond as quickly as possible to your project needs.



(left)Grounded Suede in Sleeping Fern, (right)Gentle Touch Collection, Brushed Suede in Muted Celadon, ashlar installation

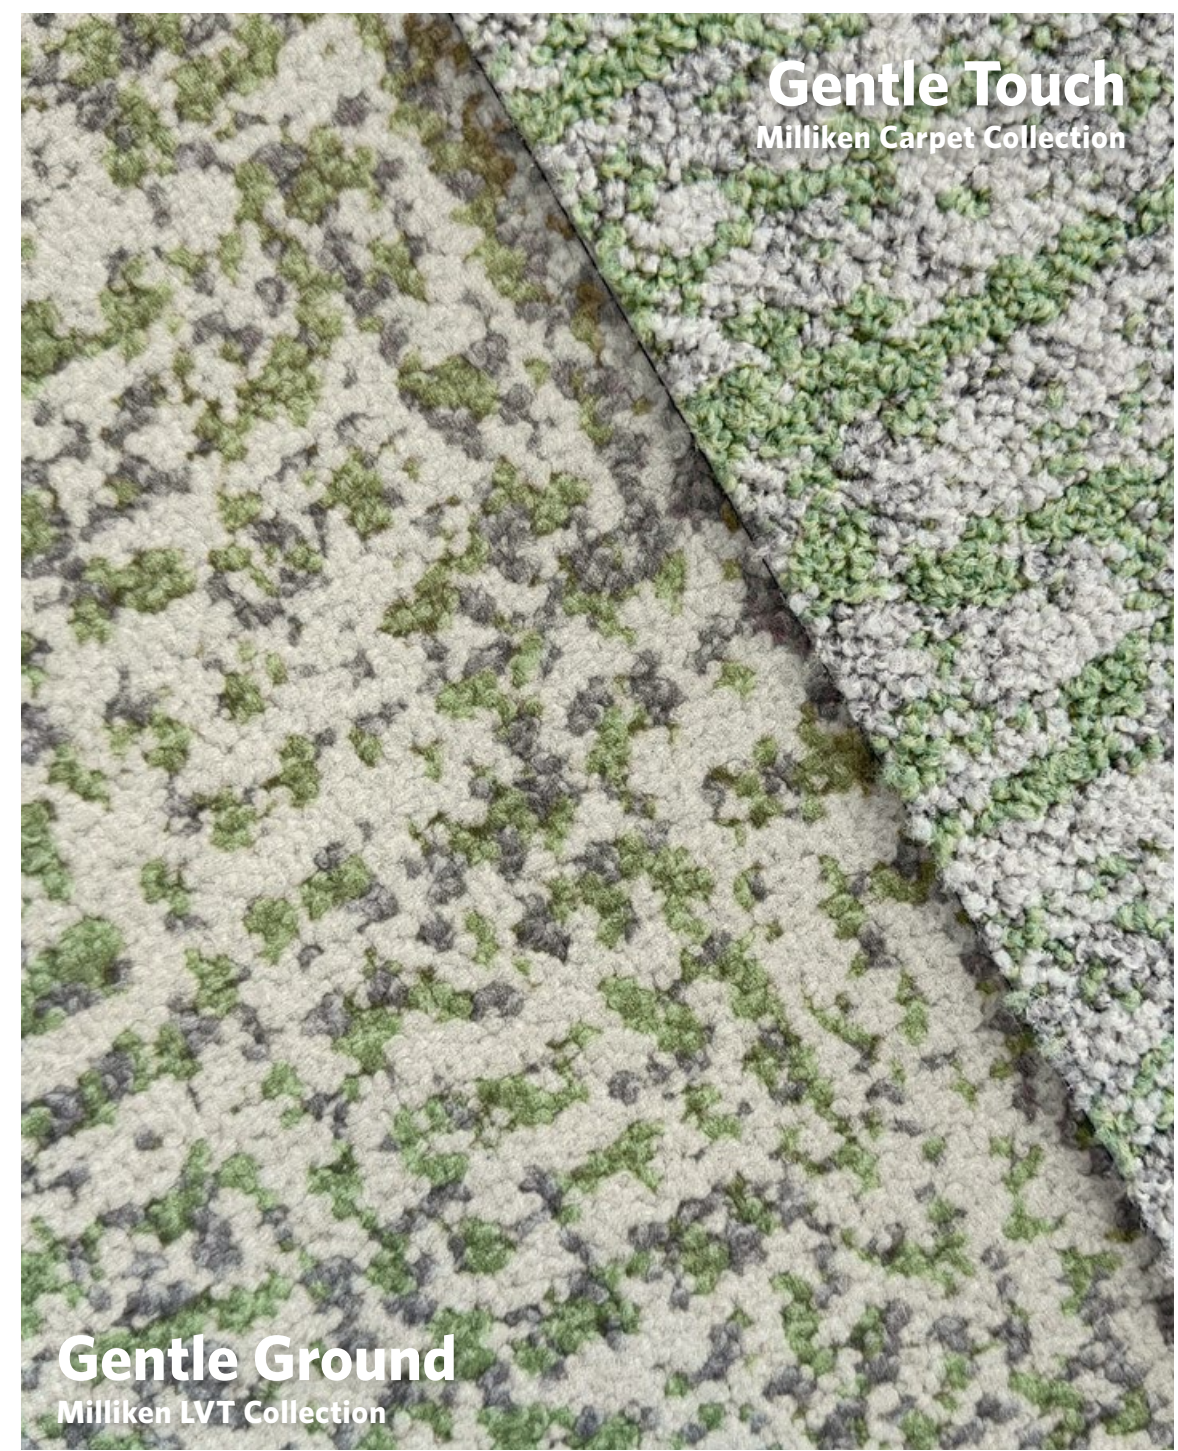

Grounded Suede

GDS145-209 Drift Soil

GDS120-209 Dewy Stone

GDS209-215 Frosted Whisper

GDS18-219 Creamy Sand

GDS254-217 Barefoot Earth

GDS143-213 Tender Root

GDS145-209 Drift Soil

Grounded Contours

GDC143-213 Tender Root


GDC254-217 Barefoot Earth

GDC18-219 Creamy Sand

GDC209-215 Frosted Whisper

GDC120-209 Dewy Stone


GDC145-209 Drift Soil

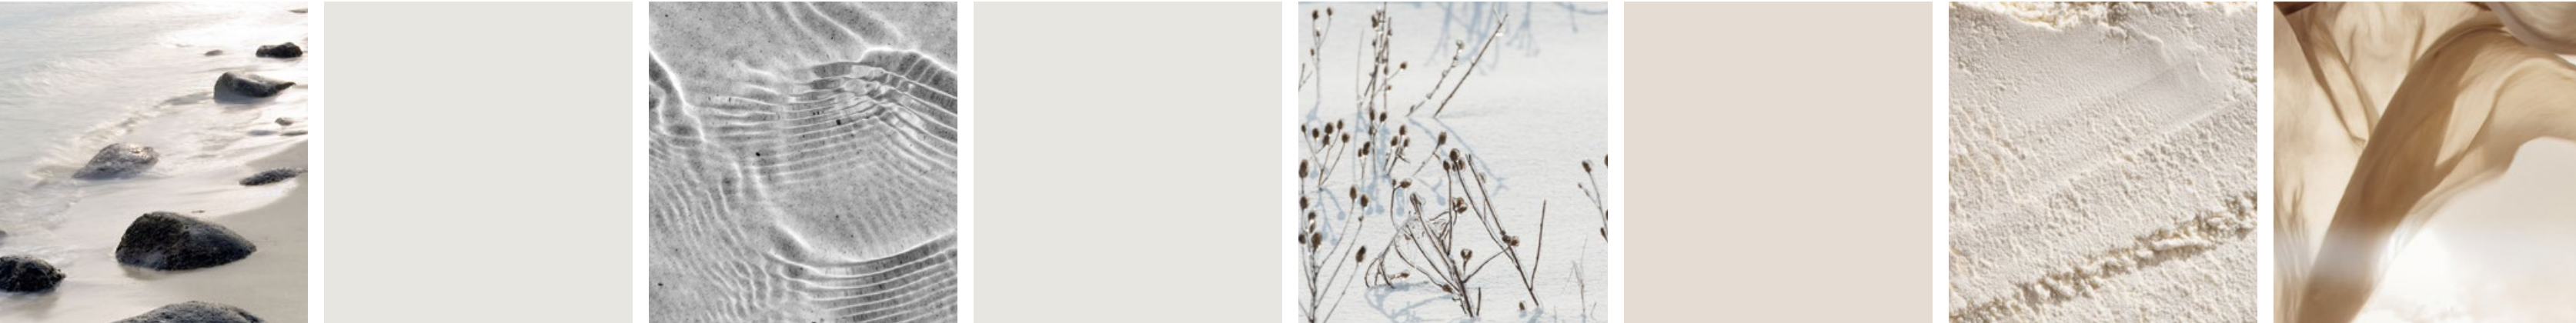


Inspired By Softness, Grounded In Strength.

Grounded Suede

GDS267-215 Dewy Lichen

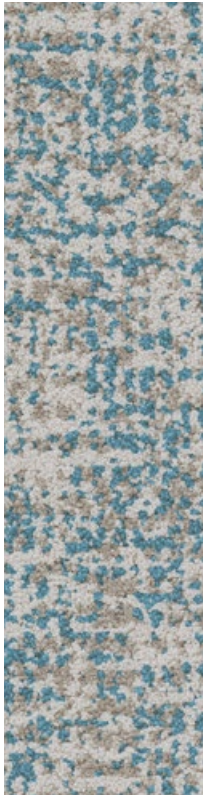

GDS141-217 Sleeping Fern

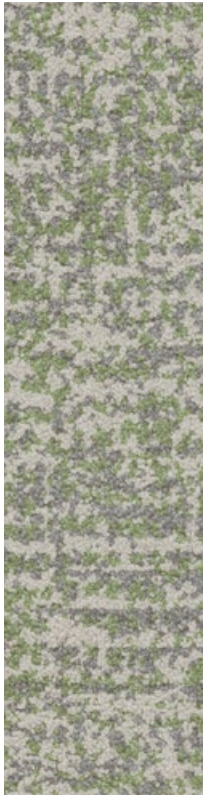

GDS253-209 Lavender Mist



GDS262-213 Veiled Brick



GDS231-215 Dandelion Dust



GDC267-215 Dewy Lichen



GDC141-217 Sleeping Fern



GDC253-209 Lavender Mist







GDC262-213 Veiled Brick



GDC231-215 Dandelion Dust



Grounded Contours

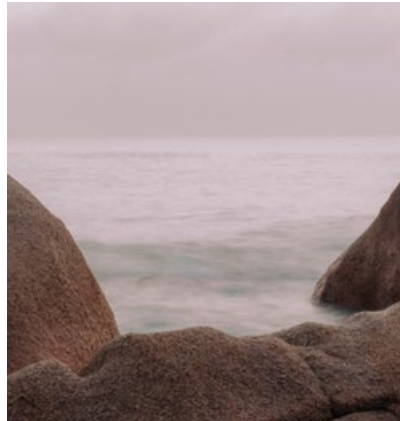



Grounded Suede in Veiled Brick, ashlar installation



Grounded Contours in Veiled Brick, ashlar installation



Grounded Suede in Frosted Whisper, Grounded Contours in Sleeping Fern, ashlar installation



Grounded Suede in Lavender Mist, ashlar installation



Grounded Contours in Lavender Mist, ashlar installation





Grounded Suede in Barefoot Earth and Veiled Brick, ashlar installation



Grounded Suede in Tender Root and Barefoot Earth, herringbone installation



(from left to right) Grounded Suede in Tender Root and Barefoot Earth, herringbone installation



Grounded Suede in Dewy Lichen, Sleeping Fern, Dandelion Dust and Frosted Whisper, ashlar installation



Grounded Suede in Dewy Stone, Grounded Contours in Dewy Stone, custom installation



Grounded Suede in Frosted Whisper, Grounded Contours in Dewy Lichen, ashlar installation



Grounded Suede in Frosted Whisper, Dewy Stone and Drift Soil, ashlar installation

A modern office interior featuring a curved reception desk in the foreground. The floor is covered in a textured, grey carpet. In the background, there are white office chairs, a long table, and large windows with orange curtains. A potted plant is visible on the desk.

M/PACT™


CARBON OFFSET PROGRAM

Climate change is one of the greatest threats facing humanity. Today, our carpet, LVT and entryway tiles are carbon offset everywhere in the world. We invite you to learn more about the significant changes we've made, then let's work together to design a better future.

LEARN MORE ►

VIEW GENTLE GROUND IN YOUR SPACE

Use the online visualiser to view different layouts of Gentle Ground. Simply upload a photograph of your space and let the visualiser do the rest.

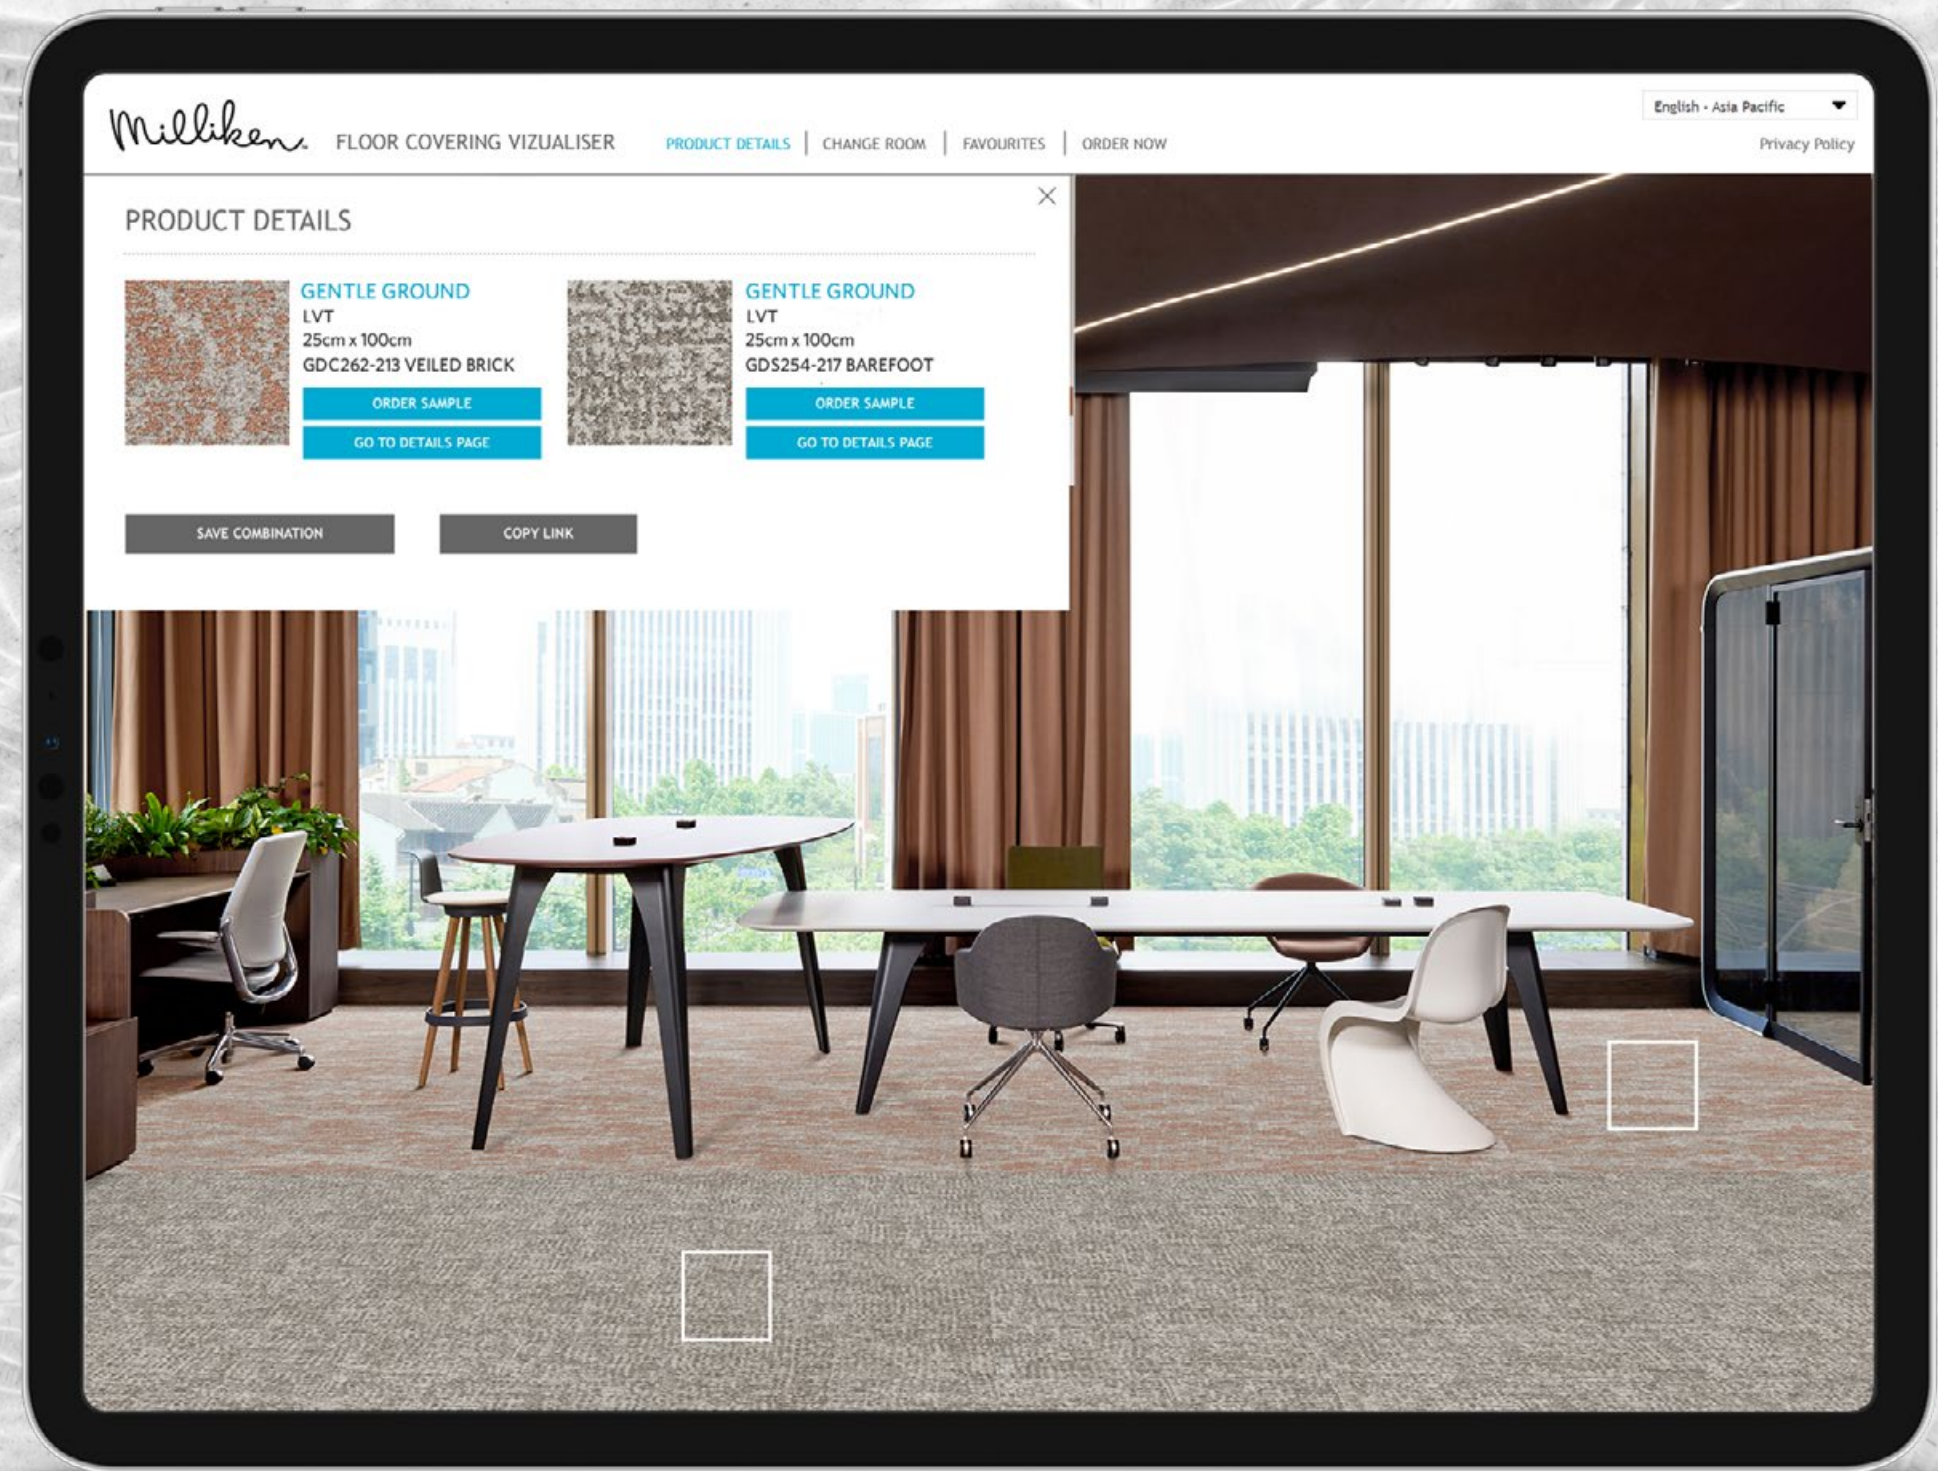



Milliken

www.millikenfloors.com

Grounded Suede in Veiled Brick, ashlar installation

GENTLE GROUND

FLEXFORM™ LVT

Construction

High Performance Flexform™ LVT

Finish

ProGuard Reinforced Polyurethane Coating

Overall Thickness

5mm

Wear Layer Thickness

0.55mm

Edge Profile

Micro Bevel

Tile Sizes

25cmX100cm

Pieces Per Box

8

Weight Per Box

19.6kg

Quantity Per Box

2 m²

Critical Radiant Flux (ISO 9239-1)

≥ 4.5kW/m²

Smoke Rate(ISO 9239-1)

<750%.min

Use Classification (ISO 10582)

Class 33 Heavy Commercial

Colour Fastness to Light (ISO 105-B02)

≥ 6

Slip Resistance (DIN 51130)

R10

Dimensional Stability (ISO 23999)

≤ 0.25 % ; Curl ≤ 2mm

Resistance to Chemicals (ASTM F925)

Pass

Residual Indentation (ISO 24343-1)

≤ 0.1mm

Castor Chair Resistance (ISO 4918)

Pass

Flexibility(ISO 24344)

Pass

Warranties

15-Year Limited Commercial Wear

产品结构

高性能弹性地板

表层工艺

ProGuard™ 增强聚氨酯涂层

总厚度

5mm

耐磨层厚度

0.55mm

倒角类型

微倒角

单片尺寸

25cmX100cm

每箱片数

8 片

每箱重量

19.6kg

每箱数量

2 m²

临界辐射通量（阻燃性）(ISO 9239-1)

≥ 4.5kW/m²

产烟量 (ISO 9239-1)

<750%.min

应用分级 (ISO 10582)

商业重度 33 级

光照色牢度 (ISO 105-B02)

≥ 6

防滑性能 (DIN 51130)

R10

加热尺寸稳定性及翘曲 (ISO 23999)

≤ 0.25 % ; 翘曲 ≤ 2mm

耐化学性能 (ASTM F925)

通过

残余凹陷 (ISO 24343-1)

≤ 0.1mm

脚轮椅测试 (ISO 4918)

通过

柔韧性 (ISO 24344)

通过

质保

15 年商用耐磨层有限质保

LVT ENVIRONMENTAL STANDARDS

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.



Declare.



Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.