



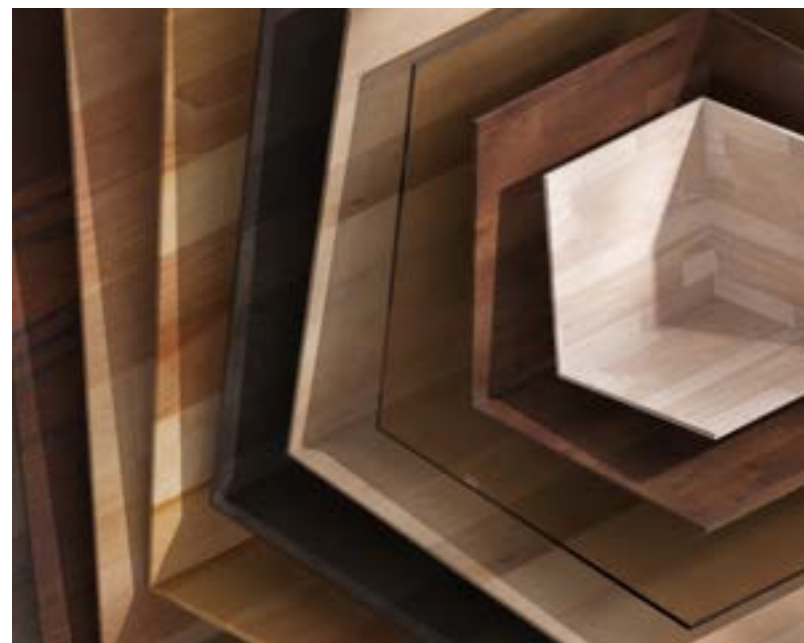

# SYMMETRY

Tessellation / Chevron /  
Clean Grain / Pressed Grain / Striae Grain

Milliken®

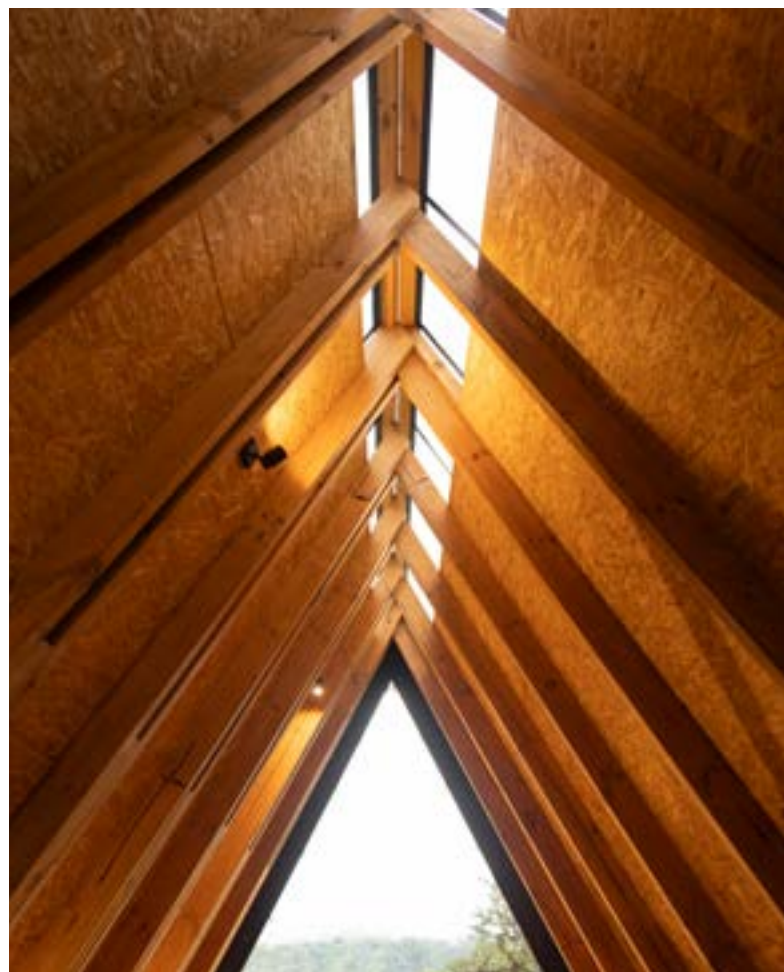

# SYMMETRY

The Symmetry Collection explores the quiet harmony between nature and structure—where the organic irregularity of wood grain meets the precision of geometric order. By balancing natural variation with intentional pattern, the collection creates a sense of calm, rhythm, and visual equilibrium within a space.



## TESSELLATION

*457.2 x 457.2mm*

Interlocking geometric forms—such as diamonds and hexagons—come together in a seamless parquet layout. The repeating structure creates a meditative field, offering architectural clarity while maintaining warmth and material richness.

# CHEVRON

228.6 x 1524mm

Defined by continuous diagonals and repeating V formations, Symmetry Chevron introduces a sense of movement through precise geometry. The pattern balances directional energy with visual order, creating rhythm across the floor while maintaining a calm, composed aesthetic.

CHEVRON  
*Right*

CHEVRON  
*Left*





## CLEAN GRAIN

*184.15 x 1219.2mm*

Smooth, understated grain with  
a calm, uniform flow.



CLG206  
FAWN



## **PRESSED GRAIN**

*184.15 x 1219.2mm*

Subtle compression and texture  
for added depth.



PSG22  
BARLEY



## STRIAE GRAIN

*184.15 x 1219.2mm*

Fine linear striations that introduce gentle movement.



STG22  
BARLEY



## SYMMETRY GRAIN

184.15 x 1219.2mm

A refined expression of wood in its purest form. Each grain is carefully curated to achieve a serene, balanced appearance across the floor, minimizing visual noise while preserving natural character.

CLEAN  
GRAIN



PRESSED  
GRAIN



STRIAE  
GRAIN





(from left to right)  
CHV15 Mesmerize  
PSG15 Tumbleweed

CLG15 Tumbleweed  
PSG22 Barley  
STG22 Barley

STG206 Fawn  
CLG206 Fawn  
TSL22 Barley



Tessellation in Barley, (insert) Striae Grain in Barley, *ashlar installation*




Pressed Grain in Tumbleweed, *ashlar installation*;  
(insert) Echoes in Mid Crust Emerald Green,  
Vista in Emerald Green, *monolithic installation*



(workstation) Striae Grain in Fawn, (corridor) Clean Grain in Tumbleweed,  
(meeting room) Woven Contours in Dove with Midnight Blue, *ashlar installation*

## INSTALLATION

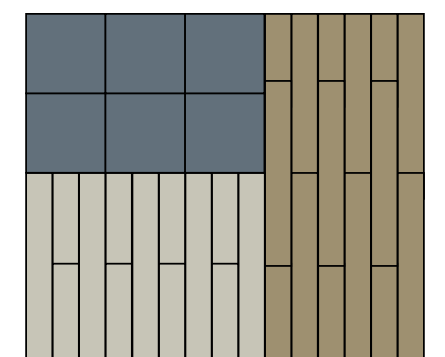

STG206  
Fawn



CLG15  
Tumbleweed



WOC196-152-180  
Dove with Midnight Blue



(from left to right)  
PSG145 Burlywood  
PSG286 Straw

CHV286 Thrive  
TSL286 Straw  
CLG219 Eggshell




Clean Grain in Eggshell, *ashlar* installation



Chevron in Thrive, ashlar installation



## INSTALLATION

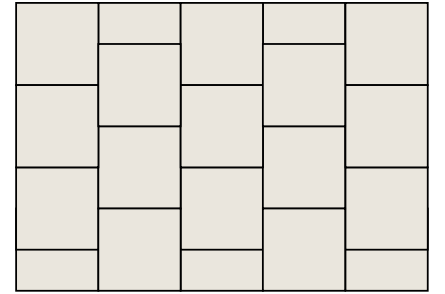

TSL286 Straw



(workstation) Pressed Grain in Straw, (corridor) Pressed Grain in Burlywood,  
(meeting room) Pattern Play in Papyrus, Pattern Play Transition in Papyrus Buttercream,  
Pattern Play in Buttercream, *ashlar* installation



(from left to right)  
PSG214 Harvest  
PSG210 Bran

TSL211 Rye  
CHV210 Bran  
CLG211 Rye



Clean Grain in Rye, *ashlar installation*




(from left to right) Clean Grain in Rye, Tessellation in Rye, *ashlar installation*,  
Clean Grain in Rye, Pressed Grain in Bran, *random ashlar installation*



Chevron in Bran, *ashlar* installation



## INSTALLATION

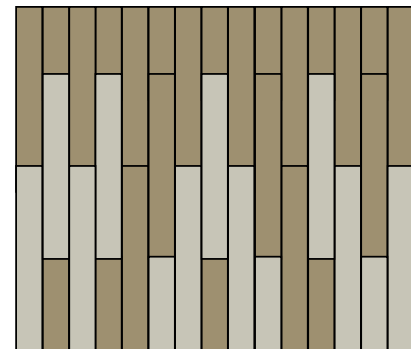

PSG210  
Bran



PSG214  
Harvest



(from left to right)  
CHV145 Abundance  
CLG145 Wenge

TSL145 Wenge  
CLG176 Rosy Brown




Tessellation in Wenge, *ashlar installation*



Clean Grain in Wenge, Clean Grain in Rosy Brown, *random installation*



## INSTALLATION

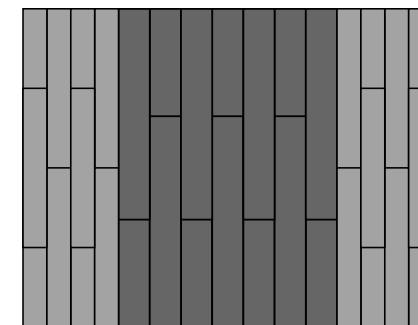

CHV145  
Abundance



CLG145  
Wenge

**Tessellation**

**Chevron**

**Clean Grain**

**Pressed Grain**

**Striae Grain**



TSL22 Barley



CHV15 Mesmerize



CLG206 Fawn



PSG22 Barley



STG206 Fawn



TSL286 Straw



CHV286 Thrive



CLG219 Eggshell



PSG286 Straw



STG22 Barley



TSL211 Rye



CHV210 Bran




CLG211 Rye



PSG210 Bran



STG22 Barley



TSL145 Wenge



CHV145 Abundance



CLG176 Rosy Brown



PSG145 Burlywood



STG22 Barley



CLG145 Wenge



PSG214 Harvest



STG22 Barley

**S Y M M E T R Y**  
**C O L O R L I N E**

# M/PACT™

CARBON OFFSET PROGRAM

## SYMMETRY IS A CARBON NEUTRAL COLLECTION


Climate change is one of the greatest threats facing humanity. Today, our carpet, LVT and entryway tiles are carbon neutral everywhere in the world. We invite you to learn more about the significant changes we've made, then let's work together to design a better future.

LEARN MORE ►



# VIEW SYMMETRY IN YOUR SPACE

Use the online visualiser to view different layouts of Symmetry. Simply upload a photograph of your space and let the visualiser do the rest.

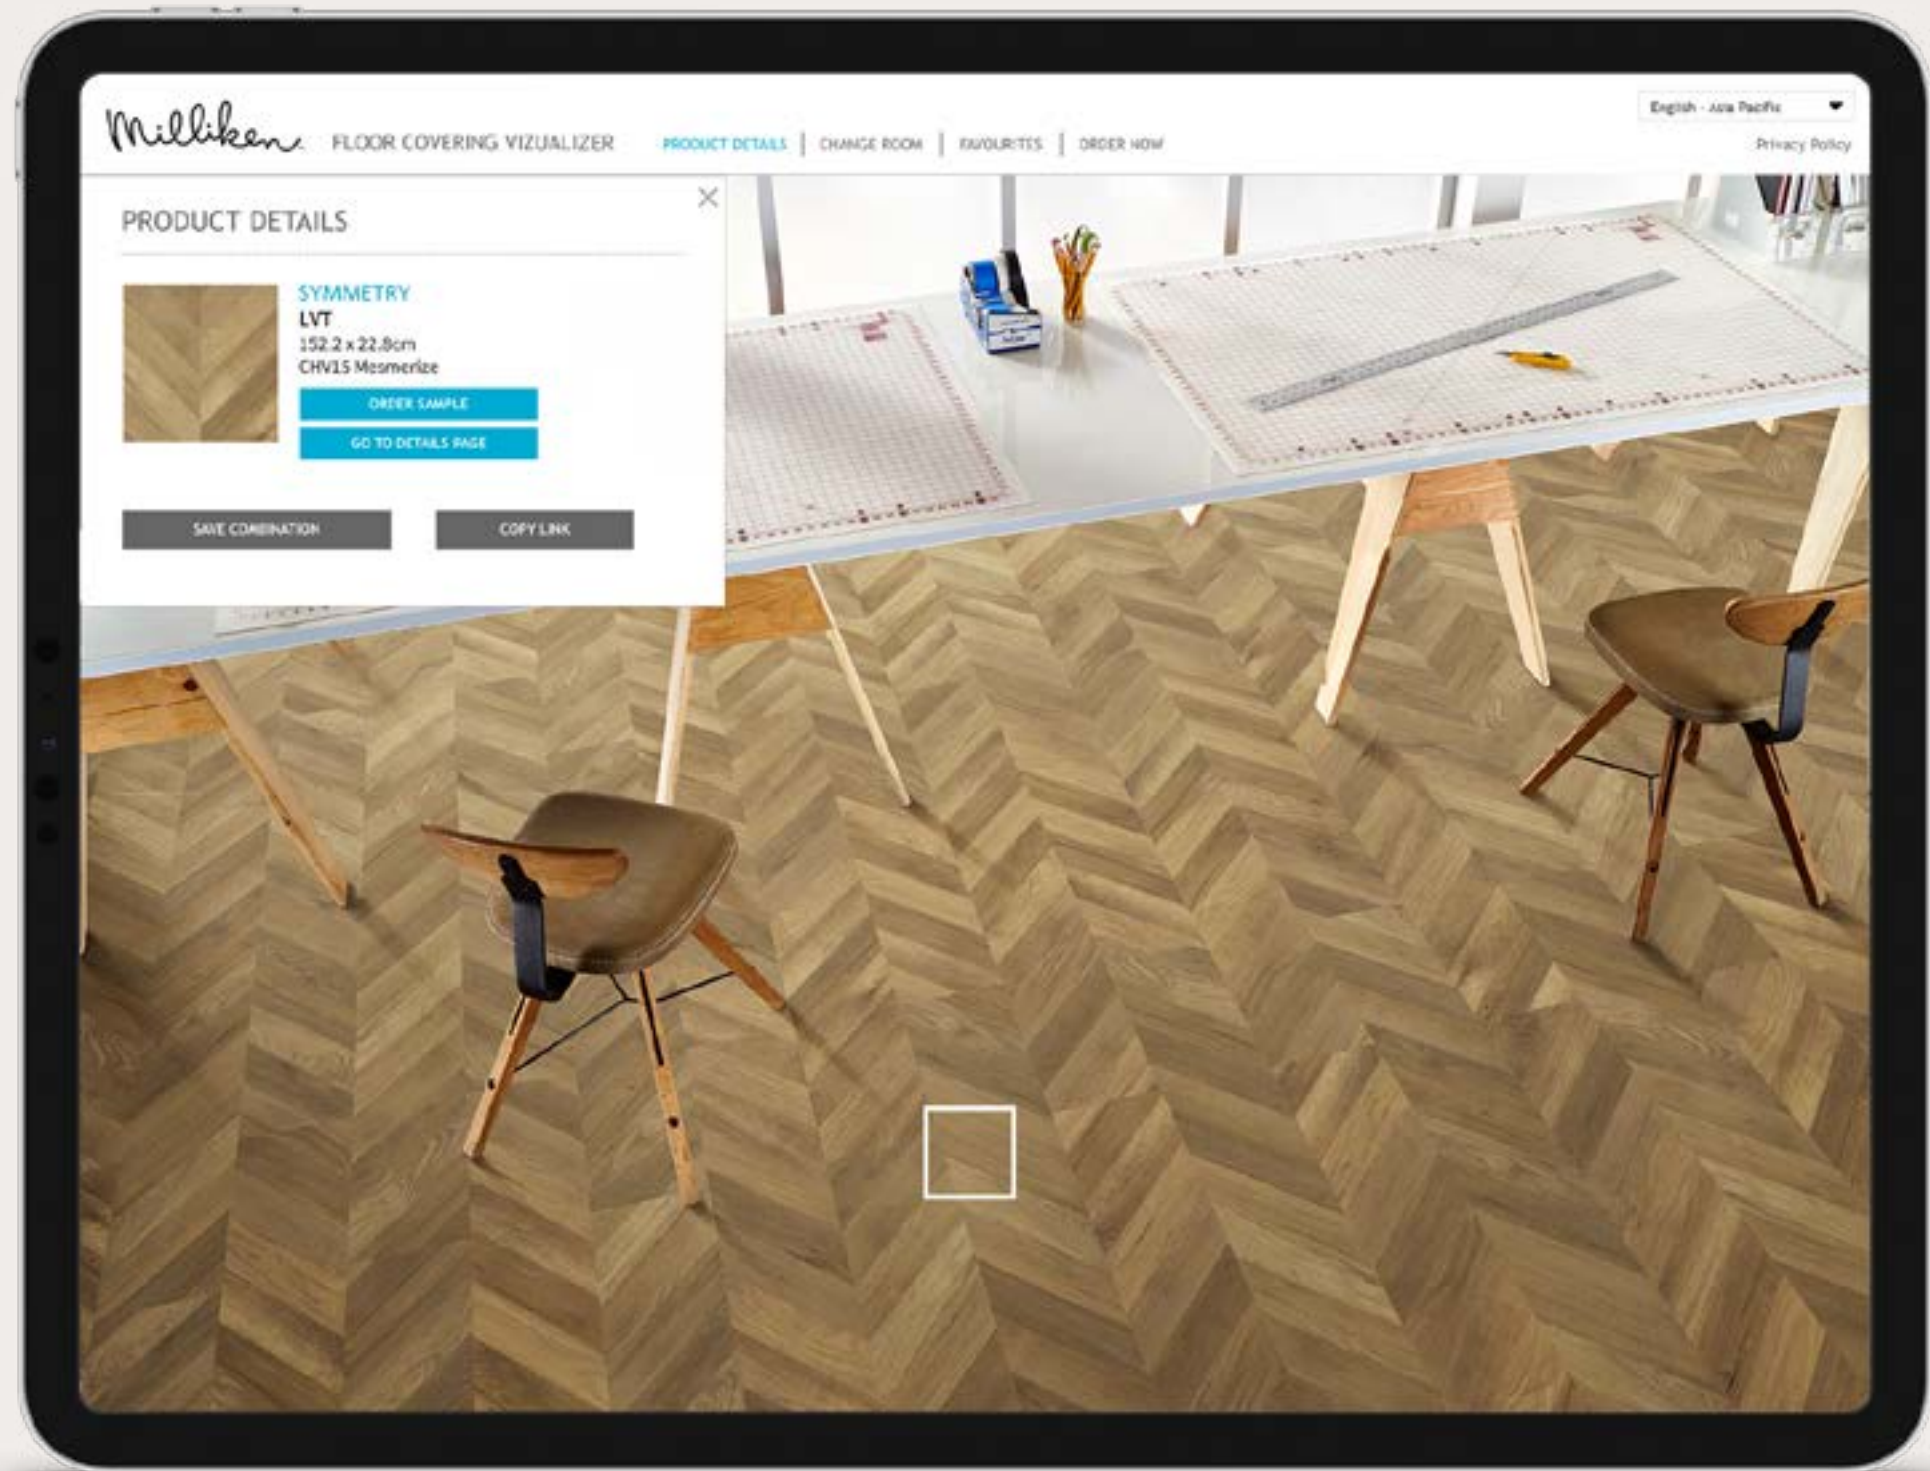

Visualize now at  
[millikenfloors.com](https://millikenfloors.com)



## SYMMETRY FLEXFORM™ LVT

### Construction

High Performance FlexForm™ LVT

### Finish

ProGuard™ Reinforced Polyurethane Coating

### Overall Thickness

5mm

### Wear Layer Thickness

0.55mm

### Edge Profile

Micro Bevel

### Tile Sizes

Clean Grain/Pressed Grain/Striae Grain:

184.15mm x 1219.2mm,

Chevron: 228.6mm x 1524mm,

Tessellation: 457.2mm x 457.2mm

### Pieces Per Box

Chevron: 6, others: 10

### Weight Per Box

Clean Grain/Pressed Grain/Striae Grain: 21.5kg,

Chevron: 20.04kg, Tessellation: 20.9kg

### Quantity Per Box

Clean Grain/Pressed Grain/Striae Grain: 2.25m<sup>2</sup>,

Chevron: 2.09m<sup>2</sup>, Tessellation: 2.09m<sup>2</sup>

### Critical Radiant Flux (ISO 9239-1)

≥ 4.5 kW/m<sup>2</sup>

### Smoke Rate (ISO 9239-1)

< 750%.min

### Use Classification (ISO 10582)

Class 33 Heavy Commercial

### Colour Fastness to Light (ISO 105-B02)

≥ 6

### Slip Resistance (DIN 51130)

R10

### Dimensional Stability (ISO 23999)

≤ 0.25% ; Curl ≤ 2 mm

### Resistance to Chemicals (ASTM F925)

Pass

### Residual Indentation (ISO 24343-1)

≤ 0.1 mm

### Castor Chair Resistance (ISO 4918)

Pass

### Flexibility (ISO 24344)

Pass

### Warranty

15-Year Limited Commercial Wear Warranty

### 产品结构

高性能弹性地板

### 表层工艺

ProGuard MAX™ 增强聚氨酯涂层

### 总厚度

5mm

### 耐磨层厚度

0.55mm

### 倒角类型

微倒角

### 单片尺寸

Clean Grain/Pressed Grain/Striae Grain:

184.15mm x 1219.2mm,

Chevron: 228.6mm x 1524mm,

Tessellation: 457.2mm x 457.2mm

### 每箱片数

Chevron: 6, others: 10

### 每箱重量

Clean Grain/Pressed Grain/Striae Grain: 21.5kg,

Chevron: 20.04kg, Tessellation: 20.9kg

### 每箱数量

Clean Grain/Pressed Grain/Striae Grain: 2.25m<sup>2</sup>,

Chevron: 2.09m<sup>2</sup>, Tessellation: 2.09m<sup>2</sup>

### 临界辐射通量 (阻燃性) (ISO 9239-1)

≥ 4.5 kW/m<sup>2</sup>

### 产烟量 (ISO 9239-1)

< 750%.min

### 应用分级 (ISO 10582)

商业重度 33 级

### 光照色牢度 (ISO 105-B02)

≥ 6

### 防滑性能 (DIN 51130)

R10

### 加热尺寸稳定性及翘曲 (ISO 23999)

≤ 0.25% ; 翘曲 ≤ 2 mm

### 耐化学性能 (ASTM F925)

通过

### 残余凹陷 (ISO 24343-1)

≤ 0.1 mm

### 脚轮椅测试 (ISO 4918)

通过

### 柔韧性 (ISO 24344)

通过

### 质保

15年商用耐磨层有限质保

### LVT ENVIRONMENTAL STANDARDS

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.



Declare.



Milliken

[www.millikenfloors.com](http://www.millikenfloors.com)

Tessellation in Barley, (insert) Striae Grain in Barley, *ashlar installation*

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.