



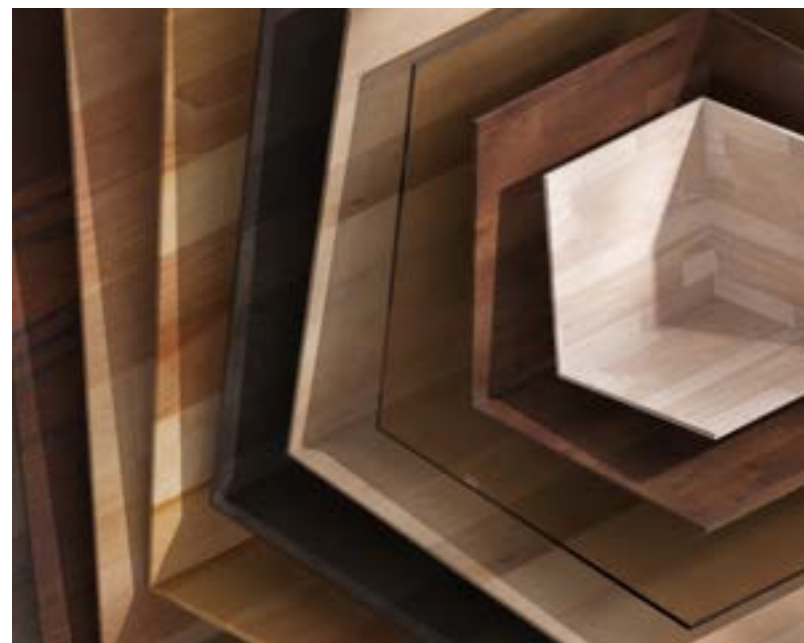

衡

Tessellation / Chevron /  
Clean Grain / Pressed Grain / Striae Grain

Milliken

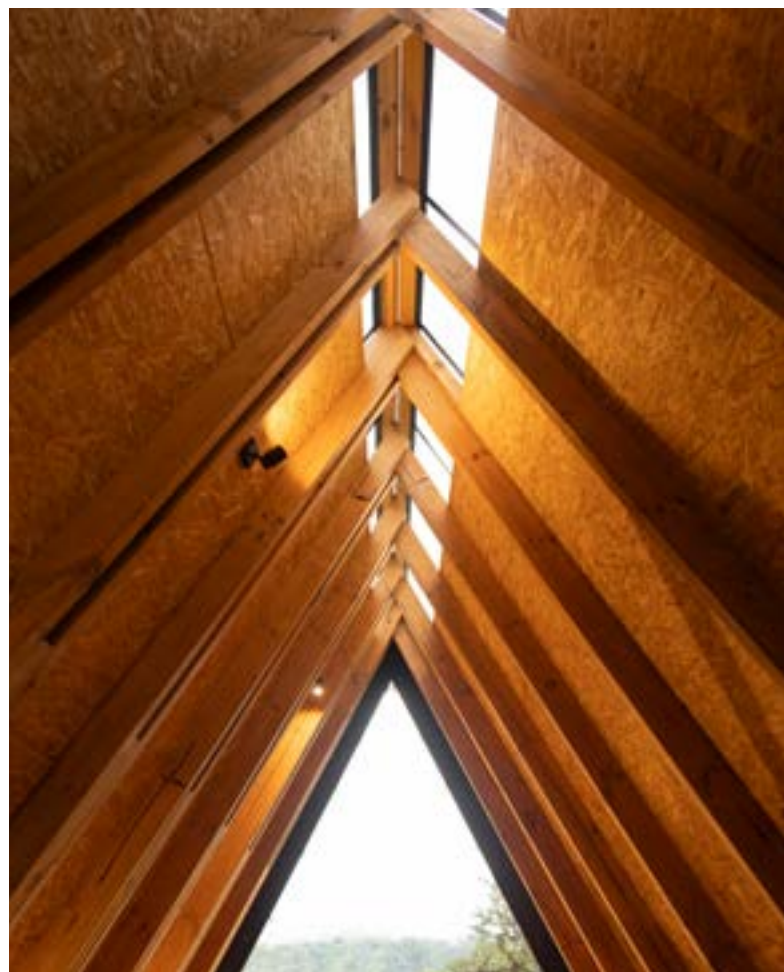

## 衡

### Symmetry 衡系列

探索自然与秩序之间的静谧平衡——木纹肌理的有机不规则，与几何结构的精准秩序在此相遇。通过对天然变化与理性图案的巧妙平衡，在空间中营造出平和、韵律与视觉均衡之感，让每一步都落入有序而舒缓的节奏之中。



## TESSELLATION

457.2 x 457.2mm

菱形、六边形等几何元素彼此拼合，于无缝拼花结构中自然延展。重复而有序图案构筑出沉静而富有节奏感的视觉场域，在赋予空间建筑感秩序的同时，依然保留材质本身的温度与丰富层次。

# CHEVRON

228.6 x 1524mm

由连续斜向线条与重复V型结构所定义，Chevron以精准几何语言赋予空间流动感。图案在方向性的张力与视觉秩序之间取得平衡，于地面铺陈出富有节奏的韵律，同时保持沉稳、克制的整体美感。

CHEVRON  
*Right*

CHEVRON  
*Left*





## CLEAN GRAIN

184.15 x 1219.2mm

纹理细腻流畅，以低调而统一的肌理走向  
呈现平静有序的视觉感受。



CLG206  
FAWN



## PRESSED GRAIN

184.15 x 1219.2mm

细微的压纹与层次肌理，为表面增添更丰富的深度与触感表现。



PSG22  
BARLEY



## STRIAE GRAIN

184.15 x 1219.2mm

细致的线性纹路轻柔铺展，为整体空间注入若隐若现的流动感。



STG22  
BARLEY



CLEAN  
GRAIN



PRESSED  
GRAIN



## SYMMETRY GRAIN

184.15 x 1219.2mm

木纹本真之美的精炼表达。  
每一处纹理都经过细心的甄选，以营造宁  
静、平衡的整体铺陈效果，在弱化视觉杂  
讯的同时，完整保留天然木纹所独有的生  
命力与质感。



STRIAE  
GRAIN



(from left to right)  
CHV15 Mesmerize  
PSG15 Tumbleweed

CLG15 Tumbleweed  
PSG22 Barley  
STG22 Barley

STG206 Fawn  
CLG206 Fawn  
TSL22 Barley



Tessellation in Barley, (insert) Striae Grain in Barley, *ashlar installation*




Pressed Grain in Tumbleweed, *ashlar installation*;  
(insert) Echoes in Mid Crust Emerald Green,  
Vista in Emerald Green, *monolithic installation*



(workstation) Striae Grain in Fawn, (corridor) Clean Grain in Tumbleweed,  
(meeting room) Woven Contours in Dove with Midnight Blue, *ashlar installation*

## INSTALLATION

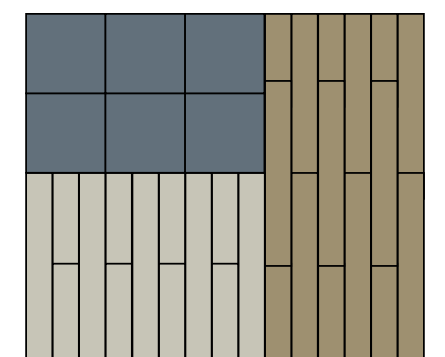

STG206  
Fawn



CLG15  
Tumbleweed



WOC196-152-180  
Dove with Midnight Blue



(from left to right)  
PSG145 Burlywood  
PSG286 Straw

CHV286 Thrive  
TSL286 Straw  
CLG219 Eggshell




Clean Grain in Eggshell, *ashlar* installation



Chevron in Thrive, ashlar installation



## INSTALLATION

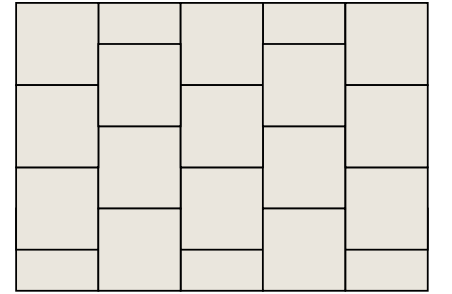

TSL286 Straw



(workstation) Pressed Grain in Straw, (corridor) Pressed Grain in Burlywood,  
(meeting room) Pattern Play in Papyrus, Pattern Play Transition in Papyrus Buttercream,  
Pattern Play in Buttercream, *ashlar installation*



(from left to right)  
PSG214 Harvest  
PSG210 Bran

TSL211 Rye  
CHV210 Bran  
CLG211 Rye



Clean Grain in Rye, *ashlar* installation




(from left to right) Clean Grain in Rye, Tessellation in Rye, *ashlar installation*,  
Clean Grain in Rye, Pressed Grain in Bran, *random ashlar installation*



Chevron in Bran, *ashlar* installation



## INSTALLATION

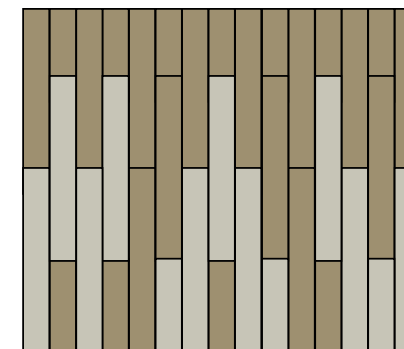

PSG210  
Bran



PSG214  
Harvest



(from left to right)  
CHV145 Abundance  
CLG145 Wenge

TSL145 Wenge  
CLG176 Rosy Brown





Tessellation in Wenge, *ashlar installation*



Clean Grain in Wenge, Clean Grain in Rosy Brown, *random installation*



## INSTALLATION

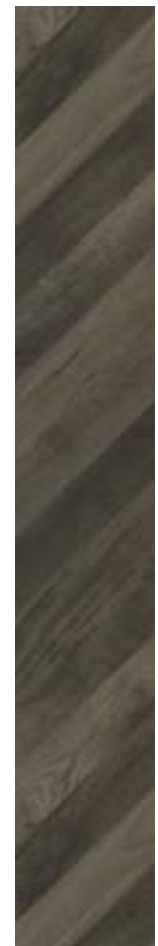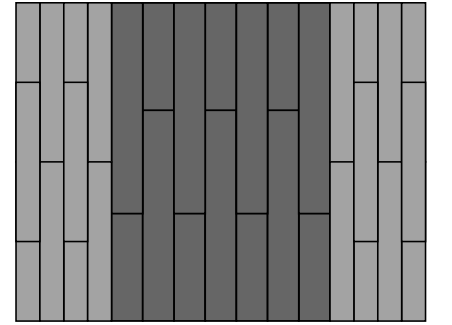

CHV145  
Abundance



CLG145  
Wenge

**Tessellation**

**Chevron**

**Clean Grain**

**Pressed Grain**

**Striae Grain**



TSL22 Barley



CHV15 Mesmerize




CLG206 Fawn



PSG22 Barley



STG206 Fawn



TSL286 Straw



CHV286 Thrive



CLG219 Eggshell



PSG286 Straw



PSG145 Burlywood



TSL211 Rye



CHV210 Bran




CLG211 Rye



PSG210 Bran



PSG214 Harvest



TSL145 Wenge



CHV145 Abundance



CLG176 Rosy Brown



CLG145 Wenge

**S Y M M E T R Y**

系 列 颜 色

# M/PACT™

CARBON OFFSET PROGRAM

## 衡系列 是一款碳中和计划产品

气候变化是人类面临的重大威胁之一。今天，我们所有的地毯、LVT 和地材产品在全球各地都是碳中和的产品。我们邀请您了解我们已经做出的重大改变，然后让我们一起规划一个更美好的未来。


[查看更多 ▶](#)



## 查看您的空间 铺装衡系列的效果

使用美利肯在线渲染工具, 查看衡系列的多种铺装。

仅需上传一张您空间的照片,  
在线渲染工具就能为您呈现地毯铺装效果。

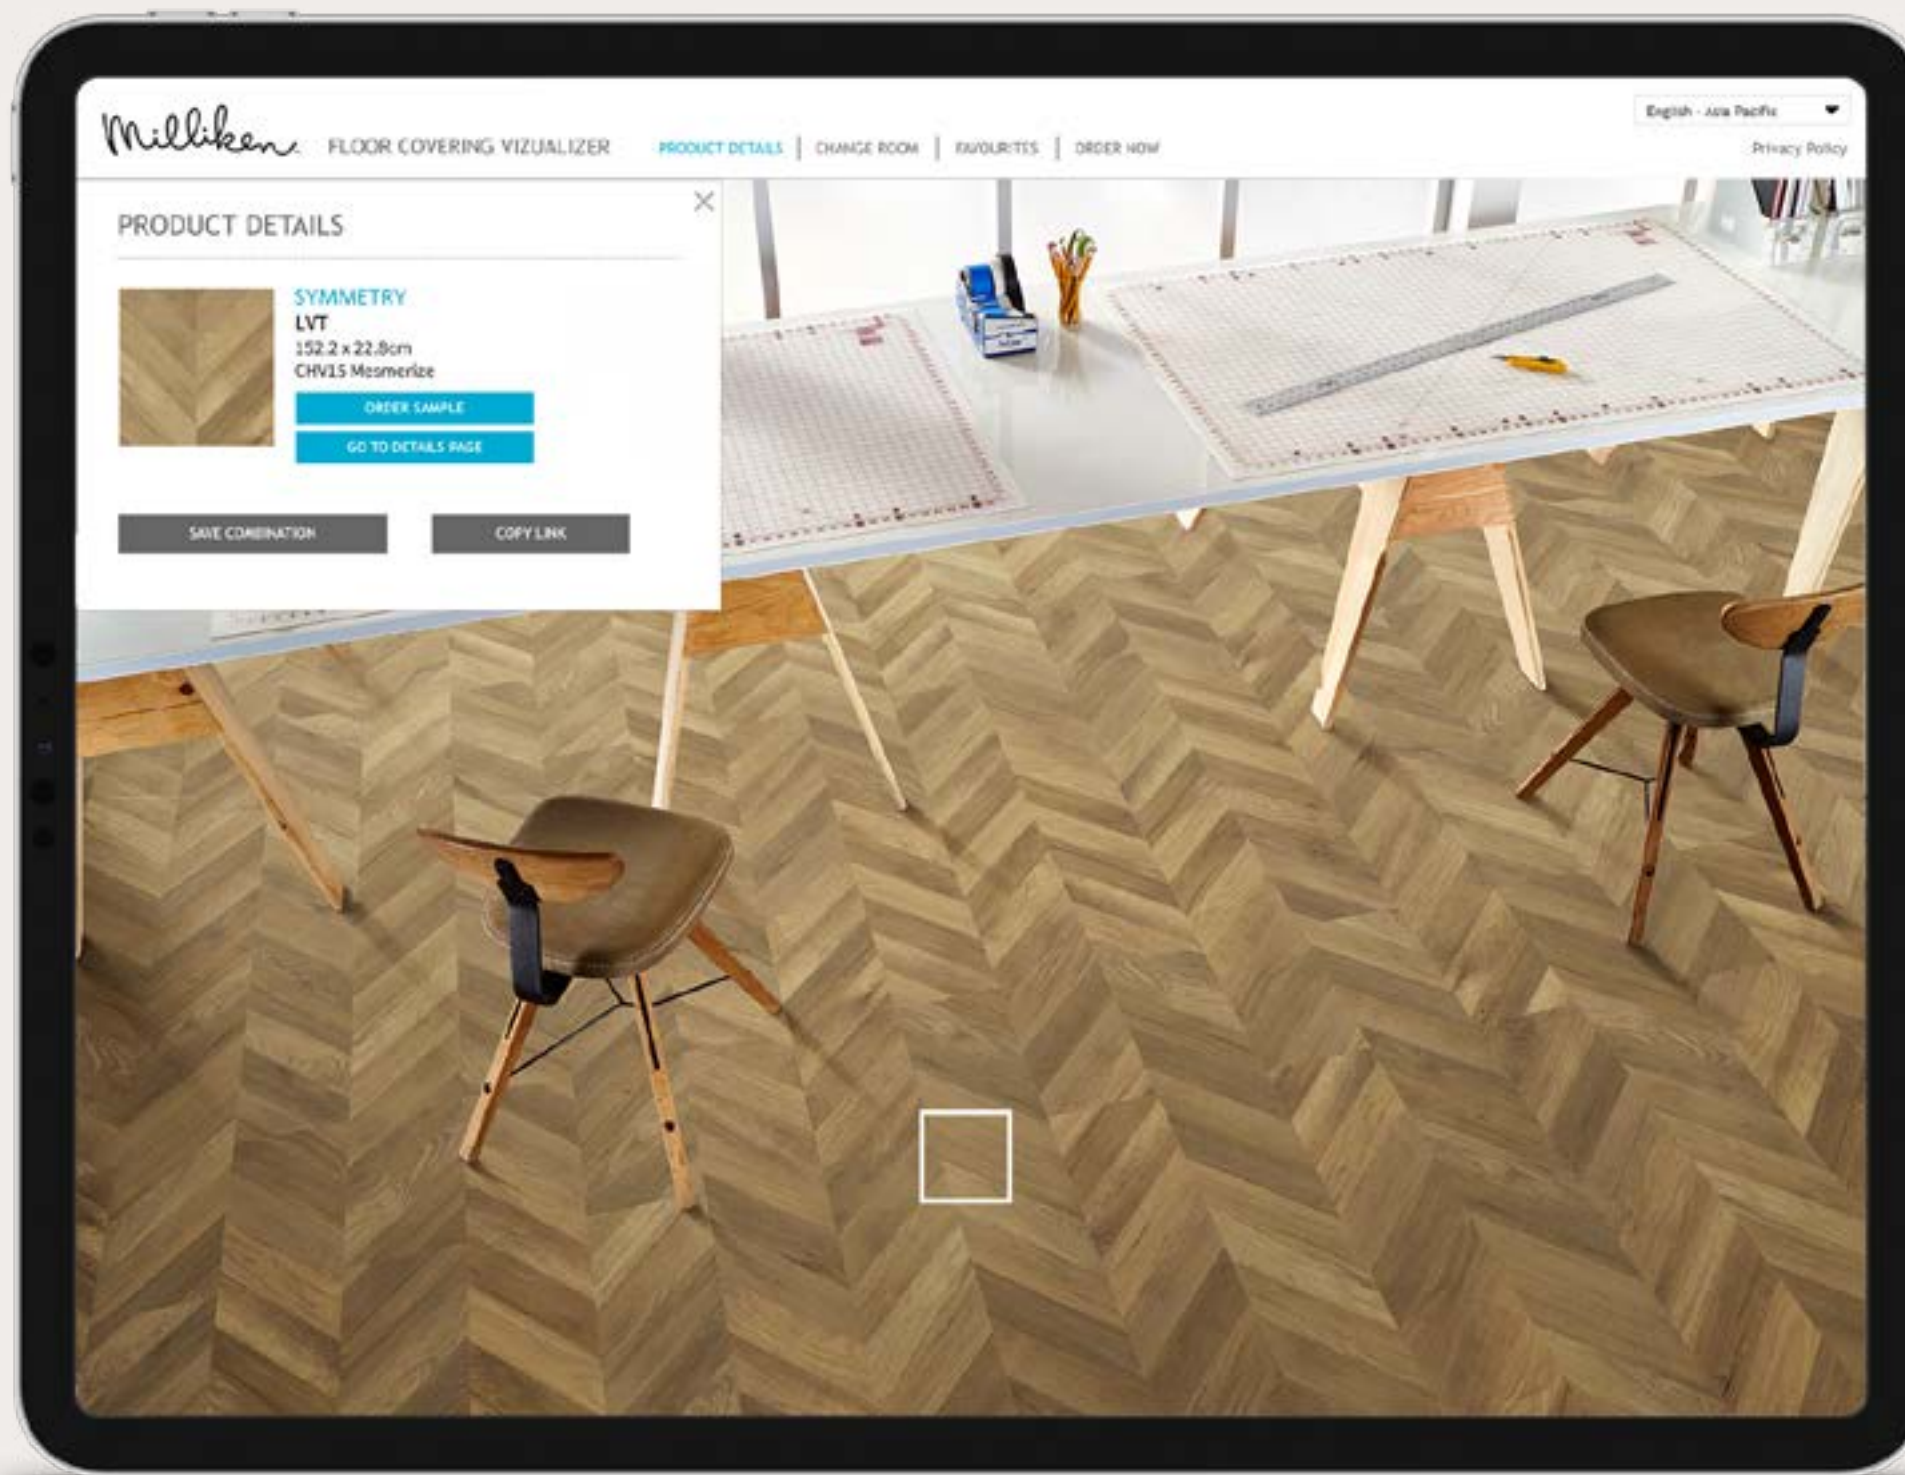

点击在线渲染  
[millikenfloors.com](http://millikenfloors.com)



## 衡 SYMMETRY FLEXFORM™ LVT

### Construction

High Performance FlexForm™ LVT

### Finish

ProGuard™ Reinforced Polyurethane Coating

### Overall Thickness

5mm

### Wear Layer Thickness

0.55mm

### Edge Profile

Micro Bevel

### Tile Sizes

Clean Grain/Pressed Grain/Striae Grain:

184.15mm x 1219.2mm,

Chevron: 228.6mm x 1524mm,

Tessellation: 457.2mm x 457.2mm

### Pieces Per Box

Chevron: 6, others: 10

### Weight Per Box

Clean Grain/Pressed Grain/Striae Grain: 21.5kg,

Chevron: 20.04kg, Tessellation: 20.9kg

### Quantity Per Box

Clean Grain/Pressed Grain/Striae Grain: 2.25m<sup>2</sup>,

Chevron: 2.09m<sup>2</sup>, Tessellation: 2.09m<sup>2</sup>

### Critical Radiant Flux (ISO 9239-1)

≥ 4.5 kW/m<sup>2</sup>

### Smoke Rate (ISO 9239-1)

< 750%.min

### Use Classification (ISO 10582)

Class 33 Heavy Commercial

### Colour Fastness to Light (ISO 105-B02)

≥ 6

### Slip Resistance (DIN 51130)

R10

### Dimensional Stability (ISO 23999)

≤ 0.25% ; Curl ≤ 2 mm

### Resistance to Chemicals (ASTM F925)

Pass

### Residual Indentation (ISO 24343-1)

≤ 0.1 mm

### Castor Chair Resistance (ISO 4918)

Pass

### Flexibility (ISO 24344)

Pass

### Warranty

15-Year Limited Commercial Wear Warranty

### 产品结构

高性能弹性地板

### 表层工艺

ProGuard MAX™ 增强聚氨酯涂层

### 总厚度

5mm

### 耐磨层厚度

0.55mm

### 倒角类型

微倒角

### 单片尺寸

Clean Grain/Pressed Grain/Striae Grain:

184.15mm x 1219.2mm,

Chevron: 228.6mm x 1524mm,

Tessellation: 457.2mm x 457.2mm

### 每箱片数

Chevron: 6, others: 10

### 每箱重量

Clean Grain/Pressed Grain/Striae Grain: 21.5kg,

Chevron: 20.04kg, Tessellation: 20.9kg

### 每箱数量

Clean Grain/Pressed Grain/Striae Grain: 2.25m<sup>2</sup>,

Chevron: 2.09m<sup>2</sup>, Tessellation: 2.09m<sup>2</sup>

### 临界辐射通量 (阻燃性) (ISO 9239-1)

≥ 4.5 kW/m<sup>2</sup>

### 产烟量 (ISO 9239-1)

< 750%.min

### 应用分级 (ISO 10582)

商业重度 33 级

### 光照色牢度 (ISO 105-B02)

≥ 6

### 防滑性能 (DIN 51130)

R10

### 加热尺寸稳定性及翘曲 (ISO 23999)

≤ 0.25% ; 翘曲 ≤ 2 mm

### 耐化学性能 (ASTM F925)

通过

### 残余凹陷 (ISO 24343-1)

≤ 0.1 mm

### 脚轮椅测试 (ISO 4918)

通过

### 柔韧性 (ISO 24344)

通过

### 质保

15年商用耐磨层有限质保

### LVT ENVIRONMENTAL STANDARDS

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.



Declare.



Milliken

[www.millikenfloors.com](http://www.millikenfloors.com)

Tessellation in Barley, (insert) Striae Grain in Barley, *ashlar installation*

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.